



Series 53TP

25-50Amp • 240/480 Vac • 3 PHASE

- **SCR Output**
- **LED Status Indicator**
- **Protective Cover Available**
(Part No. KS300)

Three-phase solid state relays switch up to 530 Vrms directly to loads such as motors, transformers, heating elements, etc. Available with either AC or DC input (coil) control in zero-voltage or random turn-on switching versions.

Manufactured in Crydom's ISO 9002 Certified facility for optimum product performance and reliability.

	MODEL NUMBERS	D53TP25D	D53TP50D	A53TP25D	A53TP50D
OUTPUT SPECIFICATIONS ①					
Operating Voltage (47-63 Hz) [Vrms]		48-530	48-530	48-530	48-530
Load Current Range③ [Arms]		.05-25	.05-50	.05-25	.05-50
Transient Overvoltage [Vpk]		1200	1200	1200	1200
Max. Surge Current, (16.6ms) [Apk]		250	625	250	625
Max. On-State Voltage Drop @ Rated Current [Vpk]		1.6	1.6	1.6	1.6
Thermal Resistance Junction to Case ($R_{\theta JC}$) [°C/W]		1.02	.63	1.02	.63
Maximum $I^2 t$ for Fusing, (8.3 msec.) [$A^2 sec$]		260	1620	260	1620
Max. Off-State Leakage Current @ Rated Voltage [mArms]		10	10	10	10
Min. Off-State dv/dt @ Max. Rated Voltage [V/μsec]②		500	500	500	500
Max. Turn-On Time ④		1/2 Cycle	1/2 Cycle	10.0 msec	10.0 msec
Max. Turn-Off Time		1/2 Cycle	1/2 Cycle	40.0 msec	40.0 msec
Power Factor (Min.) with Max. Load		0.5	0.5	0.5	0.5

INPUT SPECIFICATIONS ①

DC CONTROL

AC CONTROL

Control Voltage Range	3-32 Vdc	90-280 Vrms (60Hz)
Max. Turn-On Voltage	3.0 Vdc	90 Vrms
Min. Turn-Off Voltage	1.0 Vdc	10 Vrms
Nominal Input Impedance	450 Ohms	54.8k Ohms
Typical Input Current	10mA @ 5 Vdc	2.2mA @ 120 Vrms, 4.4mA @ 240 Vrms

©1998 CRYDOM CORP, Specifications subject to change without notice.

GENERAL NOTES

- ① All parameters at 25°C and per section unless otherwise specified.
 ② Off-State dv/dt test method per EIA/NARM standard RS-443, paragraph 13.11.1
 ③ Heat sinking required, for derating curves see page 2.
 ④ Turn-on time for random turn-on versions is 0.02 msec (DC Control Models).

For recommended applications and more information contact:

USA: (800) 8 CRYDOM • (800) 827-9366 • (619) 715-7200 • fax (619) 715-7280

Crydom Corp, 9525 Chesapeake Drive, San Diego, CA 92123 • e-mail: sales@crydom.com

WEB SITE: <http://www.crydom.com> **FASTFAX Product Information:** (888) 267-9191

UK: (44)1202 812300 • fax (44)1202 812340 Crydom International Ltd., 85, Condor Close, Woolsbridge Industrial Estate, Three-Legged Cross, Wimborne, Dorset, England BH21 6SU

GERMANY: (49)871 935405 • fax (49)871 935407, Aussere Parkstr.5, D-84032 Altdorf, Germany



CRYDOM

Control over power

Series 53TP

25-50Amp • 240/480 Vac • 3 PHASE

GENERAL SPECIFICATIONS

Dielectric Strength 50/60Hz Input/Output/Base 4000 Vrms

Insulation Resistance (Min.) @ 500 Vdc 10^9 Ohm

Max. Capacitance Input/Output 8 pF

Ambient Operating Temperature Range -40 to 80°C

Ambient Storage Temperature Range -40 to 125°C

MECHANICAL SPECIFICATIONS

Weight: (typical) 10.3 oz. (315g)

Encapsulation: Thermally Conductive Epoxy


Terminals: Screws and Saddle Clamps Furnished

AVAILABLE OPTIONS


-10 Non-Zero Cross, Instantaneous Turn-On
Example: **D53TP50D-10**

DP 2 Controlled, 1 Linked (A1-A2)
Example: **D53DP50D**

Crydom Heat Sinks offer excellent thermal management and are perfectly matched to the load current ratings of Crydom panel mount relays. Request Crydom's Heat Sink specification sheet for all the details.

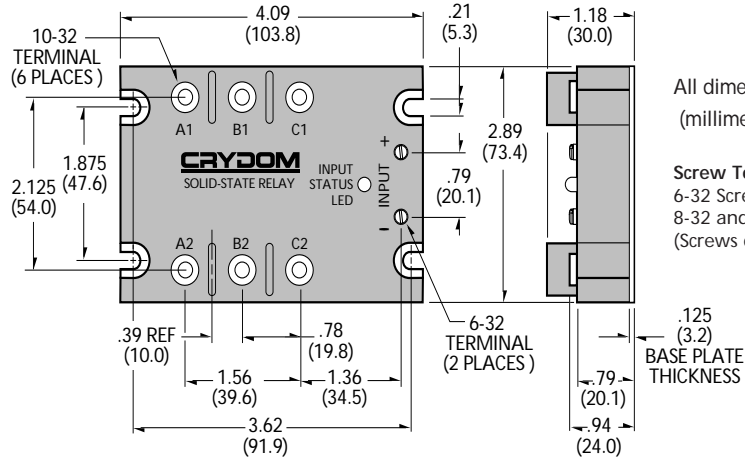

CURRENT DERATING CURVES

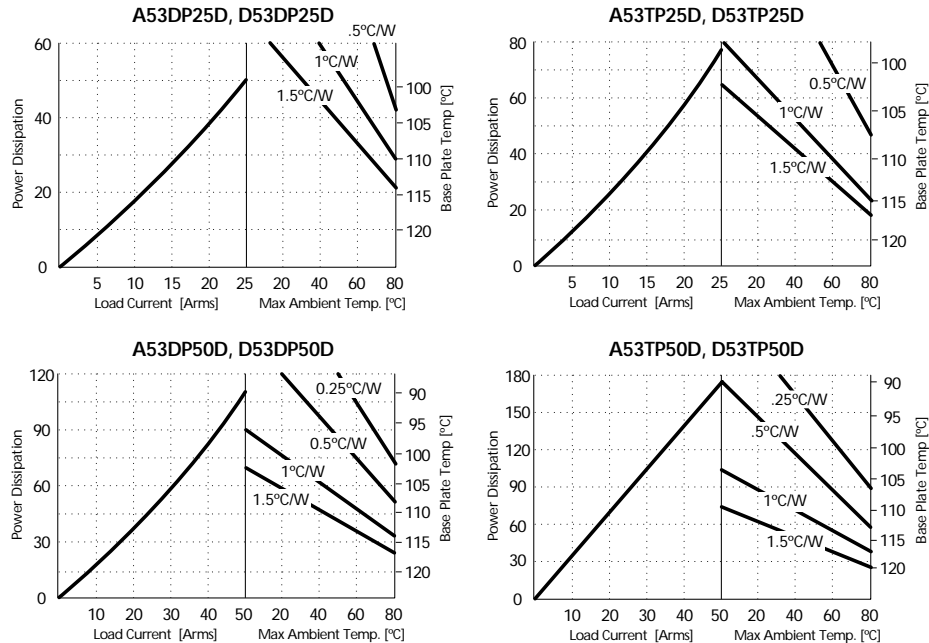

©1998 CRYDOM CORP, Specifications subject to change without notice.

APPROVALS

UL E116950
CSA LR81689
VDE 5941 UG



For recommended applications and more information contact:

USA: (800) 8 CRYDOM • (800) 827-9366 • (619) 715-7200 • fax (619) 715-7280

Crydom Corp, 9525 Chesapeake Drive, San Diego, CA 92123 • e-mail: sales@crydom.com

WEB SITE: <http://www.crydom.com> FASTFAX Product Information: (888) 267-9191

UK: (44)1202 812300 • fax (44)1202 812340 Crydom International Ltd., 85, Condor Close,

Woolbridge Industrial Estate, Three-Legged Cross, Wimborne, Dorset, England BH21 6SU

GERMANY: (49)871 935405 • fax (49)871 935407, Aussere Parkstr.5, D-84032 Altdorf, Germany

